


Quick Reference Guide Addendum

7

Turn on Reader and scan RFID tag as shown below. After a few seconds, “Insert Calibration Cartridge” will be displayed.

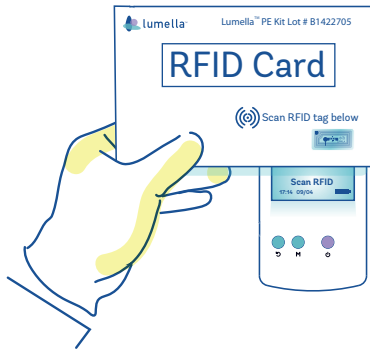

8a

Insert Calibration Cartridge completely into the cartridge slot, arrow side first. If the Reader passes, “Insert Test Cartridge” will be displayed.



8b

Insert the Test Cartridge completely into the cartridge slot, arrow side first. “Apply Sample” will appear in the display.

